IN THE CLAIMS

Please amend Claims 1, 5, 6, 7, 11-14, 15, 17 and 19 as follows:

1. (Currently Amended) A method of determining a <u>first</u> motion vector <u>and a second motion vector</u> for a <u>first</u> macroblock and a second macroblock, respectively, of a present image from a previous image, the method comprising:

selecting a predetermined pattern of pixels in the previous image;

computing a <u>first-macroblock</u> difference measure for each of a <u>first</u> plurality of pixel blocks in the previous image to form a plurality of <u>first-macroblock</u> difference measures <u>for the first macroblock</u> using the predetermined pattern of pixels;

selecting an a first origin block from the <u>first</u> plurality of pixel blocks having a lowest <u>first-macroblock</u> difference measure; and

computing the <u>first</u> motion vector using the <u>first</u> origin block and the first <u>macroblock</u>. macroblock;

computing a second-macroblock difference measure for each of a second plurality of pixel blocks in the previous image to form a plurality of second-macroblock difference measures for the second macroblock using the predetermined pattern of pixels;

selecting an a second origin block from the second plurality of pixel blocks having a lowest second-macroblock difference measure; and

computing the second motion vector using the second origin block and the second macroblock.

- 2. (Original) The method of Claim 1, wherein the predetermined pattern of pixels includes less than or equal to half of the pixels in the previous image.
- 3. (original) The method of Claim 1, wherein the predetermined pattern of pixels includes a fourth of the pixels of the previous image.
- 4. (original) The method of Claim 1, wherein the y-coordinate modulo four of each pixel in the predetermined pattern of pixels has a y-coordinate is equal to three or zero.
- 5. (currently amended) The method of Claim 1, wherein computing a <u>first-macroblock</u> difference measure for each of a <u>first</u> plurality of pixel blocks in the previous image to form a plurality of <u>first-macroblock</u> difference measures <u>for the first macroblock</u> using the predetermined pattern of pixels further comprises:

computing an absolute difference between each pixel in both the pixel block and the predetermined pattern with a corresponding pixel in the <u>first</u> macroblock to create a plurality of absolute differences;

summing the plurality of absolute differences to compute the difference measure.

6. The method of Claim 1, wherein computing a first-macroblock difference measure for each of a first plurality of pixel blocks in the previous image to form a plurality of first-macroblock difference measures for the first macroblock using the predetermined pattern of pixels further comprises:

computing a squared difference between each pixel in both the pixel block and the predetermined pattern with a

VWE-001-1 US

corresponding pixel in the <u>first</u> macroblock to create a plurality of squared differences;

summing the plurality of squared differences to compute the difference measure.

7. (Currently Amended) A method of determining a <u>first</u> motion vector <u>and a second motion vector</u> for a <u>first</u> macroblock and a second macroblock, respectively, of a present image from a previous image, the method comprising:

selecting a predetermined pattern of pixels in the previous image;

selecting a subpattern of pixels from the predetermined pattern of pixels;

computing a first <u>first-macroblock</u> difference measure for each of a first plurality of <u>first-macroblock</u> pixel blocks in the previous image to form a plurality of first <u>first-macroblock</u> difference measures using the subpattern of pixels;

selecting a first closest <u>first-macroblock</u> matching pixel block from the first plurality of <u>first-macroblock</u> pixel blocks having a lowest first <u>first-macroblock</u> difference measure; and

computing a first accurate <u>first-macroblock</u>
difference measure for the first closest <u>first-macroblock</u>
matching pixel block using the predetermined pattern of
pixels:

computing a first second-macroblock difference measure for each of a first plurality of second-macroblock pixel blocks in the previous image to form a plurality of first second-macroblock difference measures using the subpattern of pixels;

SN:09/842,201

selecting a first closest second-macroblock matching pixel block from the first plurality of second-macroblock pixel blocks having a lowest first second-macroblock difference measure; and

computing a first accurate second-macroblock
difference measure for the first closest second-macroblock
matching pixel block using the predetermined pattern of
pixels.

- 8. (original) The method of Claim 7, wherein the predetermined pattern of pixels includes a fourth of the pixels of the previous image.
- 9. (original) The method of Claim 7, wherein the y-coordinate modulo four of each pixel in the predetermined pattern of pixels has a y-coordinate is equal to three or zero.
- 10. (original) The method of Claim 7, wherein the subpattern of pixels includes a fourth of the pixels of the predetermined pattern.
- 11. (currently amended) The method of Claim 7, wherein computing a first <u>first-macroblock</u> difference measure for each of a first plurality of <u>first-macroblock</u> pixel blocks in the previous image to form a plurality of first <u>first-macroblock</u> difference measures using the subpattern of pixels comprises:

computing an absolute difference between each pixel in both the first-macroblock pixel block and the subpattern with a corresponding pixel in the first-macroblock to create a plurality of absolute differences;

summing the plurality of absolute differences to compute the first difference measure.

12. (currently amended) The method of Claim 7, wherein computing a first <u>first-macroblock</u> difference measure for each of a first plurality of <u>first-macroblock</u> pixel blocks in the previous image to form a plurality of first <u>first-macroblock</u> difference measures using the subpattern of pixels comprises:

computing an absolute difference between each pixel in both the <u>first-macroblock</u> pixel block and the predetermined pattern with a corresponding pixel in the <u>first</u> macroblock to create a plurality of absolute differences;

summing the plurality of absolute differences to compute the first accurate difference measure.

13. (currently amended) The method of Claim 7, further comprising

computing a second <u>first-macroblock</u> difference measure for each of a second plurality of <u>first-macroblock</u> pixel blocks in the previous image to form a plurality of second <u>first-macroblock</u> difference measures using the subpattern of pixels;

selecting a second closest <u>first-macroblock</u> matching pixel block from the second plurality of <u>first-macroblock</u> pixel blocks having a lowest <u>first-macroblock</u> difference measure; and

computing a second accurate <u>first-macroblock</u> difference measure for a second closest <u>first-macroblock</u> matching pixel block using the predetermined pattern of pixels.

14. (currently amended) The method of Claim 13, further comprising:

VWE-001-1 US

SN:09/842,201


selecting the first closest <u>first-macroblock</u> matching pixel block as an origin block when the first accurate <u>first-macroblock</u> difference measure is less than or equal to the second accurate <u>first-macroblock</u> difference measure;

selecting the second closest <u>first-macroblock</u> matching pixel block as the origin block when the second accurate <u>first-macroblock</u> difference measure is less the first accurate <u>first-macroblock</u> difference measure; and

computing the motion vector using the origin block and the first macroblock.

- 15. (currently amended) A video encoder configured to determine a <u>first</u> motion vector <u>and a second motion vector</u> for a <u>first</u> macroblock <u>and a second macroblock, respectively,</u> of a present image from a previous image, the video encoder comprising:
 - a frame buffer configured to store the <u>first</u> macroblock, the second macroblock and the previous image;
 - a first first-phase processing unit coupled to the frame buffer and configured to compute a first plurality of first-macroblock difference measures and a first plurality of second-macroblock difference measures using a predetermined pattern of pixels;
 - a comparator coupled to the first first-phase processing unit and configured to select an a first origin block based on the first plurality of first-macroblock difference measures and a second origin block based on the plurality of second-macroblock difference measures.
- 16. (original) The video encoder of Claim 15, further comprising a cache coupled between the frame buffer and the first first-phase processing unit.

SN:09/842,201

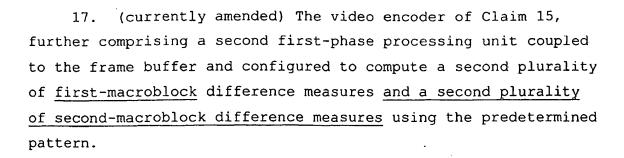

- 18. (original) The video encoder of Claim 15, further comprising a first second-phase processing unit coupled to the first first-phase processing unit and the comparator, wherein the first second-phase comparator is configured to compute a difference measure using a subpattern of pixels.
- 19. (currently amended) The video encoder of Claim 18, further comprising:

second first-phase processing unit coupled to the frame buffer and configured to compute a second plurality of first-macroblock difference measures and a second plurality of second-macroblock difference measures using the predetermined pattern; and

a second second-phase processing unit coupled to the second first-phase processing unit and the comparator, wherein the second second-phase comparator is configured to compute a difference measure using the subpattern of pixels.